




OMMELIFT
USA

Telescopic Lift 3700 RBDJ

TECHNICAL DATA 3700 RBDJ

Max. working height, ft (with standard moveable Jib)	121'5"
Max. side reach, ft	45'10"
Max. basket load, lbs	551 lbs at full height
Rotation	± 355°
Basket size, ft (w x l x h)	4'1" x 2'6" x 3'6"
Turnable basket	± 180°
Battery 8x6V	24v/400Ah/5h
Charger	24 v/30 A
Diesel engine, Kubota	D72214 kW/18.8 hp
Transport length, ft	25'6"
Transport length w/out basket, ft	23'7"
Transport height, ft	6'6"
Transport width, ft (Min-Max)	3'8" - 4'2"
Outrigger Spread-Wide, ft	17'5"/15' (max/min)
Outrigger Spread-Narrow, ft	10'6"/9'4"(max/min)
Total weight, lbs	12,015 lbs
Gradeability - up hill	19.3° (35%)
Gradeability - cross hill	14° (25%)
Deployment ability	21.8° (40%)
110V outlet in basket, Max. 10A	Standard
Variable Width Undercarriage	Standard

All specifications are subject to change without notice

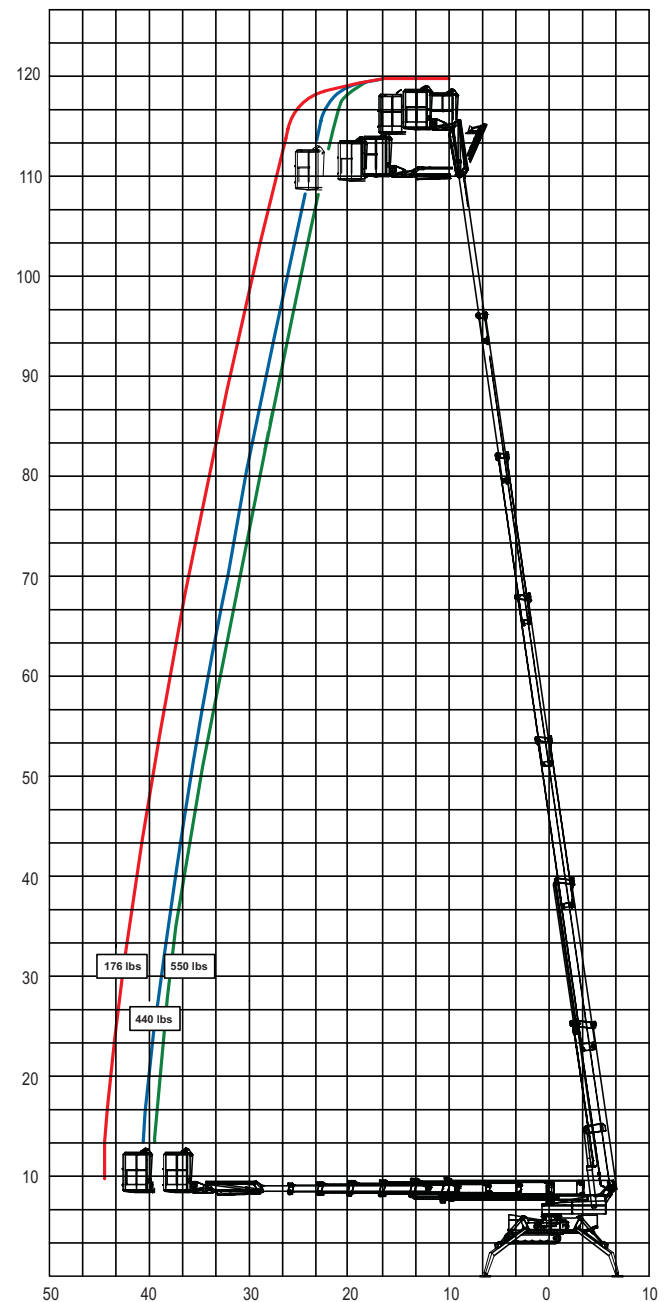


Omme Tracked Self Propelled Aerial Lifts offer versatility of use and deployment ability not matched by any other type or brand of equipment. While Rubber Tracked Undercarriage, coupled with Kubota Diesel engine, allows our lifts to traverse soft muddy terrain, hilly lawns and delicate indoor surfaces of all types with ease and without any impact, the manual leveling of the outriggers assures safe setup in the most difficult situations the first time - every time.



Battery power, rechargeable from a 110V source or by the Diesel engine, offers clean and pollution-free use indoors and greatly increases fuel efficiency of the Diesel engine by being a true "Hybrid" system.

Extremely compact dimensions (3'8" width x 6'6" height) allow access thru tight passages, while variable spread outriggers and **deployment ability on slopes up to 40%** assure that a safe work configuration always can be found.

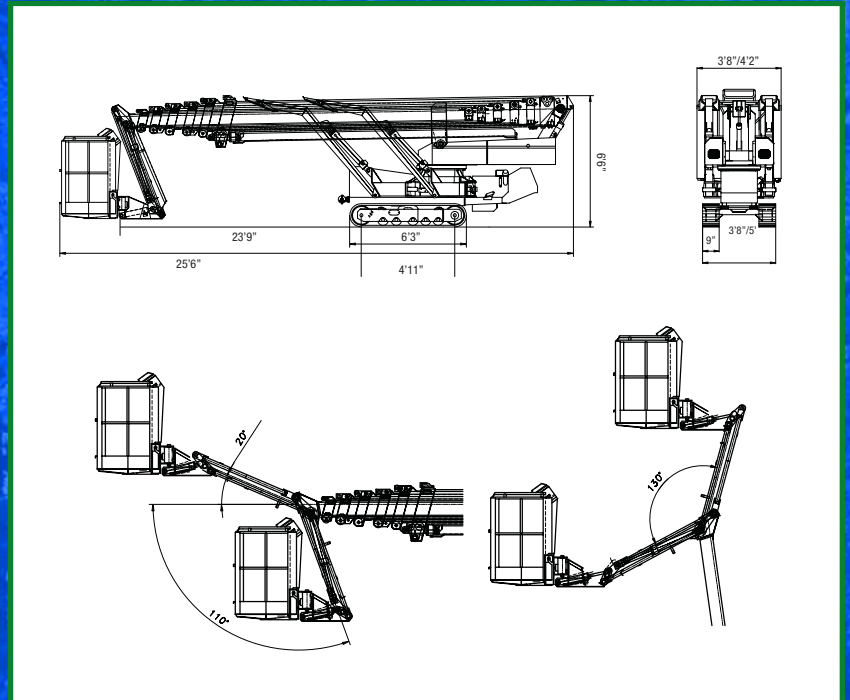

Newly designed jib allows for 130° degree articulation, ±180° degree basket rotation and ability to easily detach the basket from the machine. This new feature gives the operator much greater versatility of reach while creating the most compact and maneuverable crawler machine in its class on the market.

OPTIONS

- Wireless Remote Control Track Drive • Spotlight in the basket
- Transformer 24v/100A, allows for quick battery recharge
- Intercom • Flashing beacon lights on boom and stabilizers (5)
- White Tracks for light colored surfaces where scuff marks are unacceptable
- Custom colors



Standard Variable Width Undercarriage

3'8" - 4'11"

TRACKED LIFTS

1-866-LIFT-575
(1-866-543-8575)

Manufactured by Omme Lift A/S • Distributed in USA by:
Tracked Lifts, Inc., 2118 Rt. 106, Syosset, NY 11791, USA

www.trackedlifts.com
info@trackedlifts.com