


PLATFORM BASKET 22.10 46KV






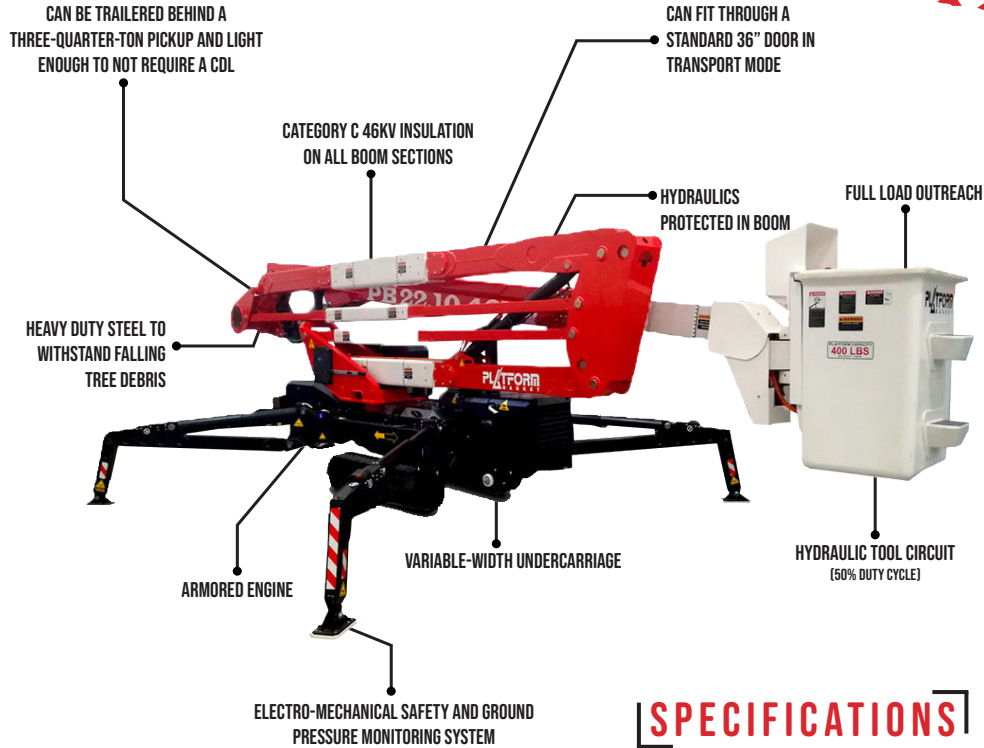


SPECIFICATIONS

Max. working height	72'
Max. outreach	32'8" (at 300lbs)
Max. basket load	300 lbs
Basket size	2'5" x 1'11" x 3'5" (1-man bucket interior)
Basket rotation	± 90°
Turret rotation	± 180°
Traveling length	25'5"
Traveling height	6'9" (narrow mode) / 7'5" (wide mode)
Traveling width	34.5" (narrow mode) / 44" (wide mode)
Outrigger Spread	14'7" x 14'7"
Battery	12V Emergency Descent System
Diesel engine	15HP
Total weight	7,937 lbs
Gradability, max. across slope	29% (16°)
Gradability, max. up and down slope	29% (16°)
Deployment ability on slopes up to	29% (16°)

DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

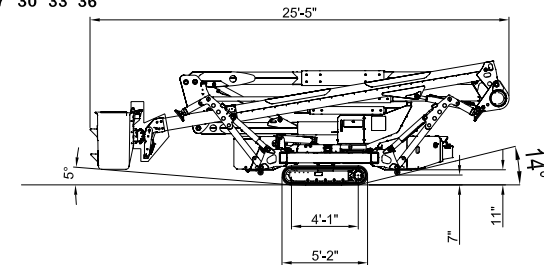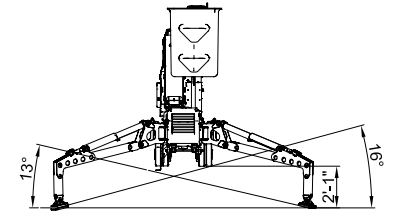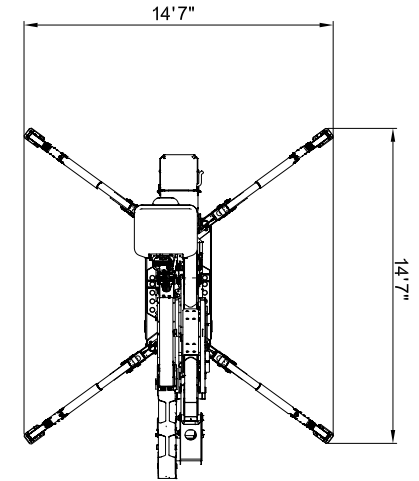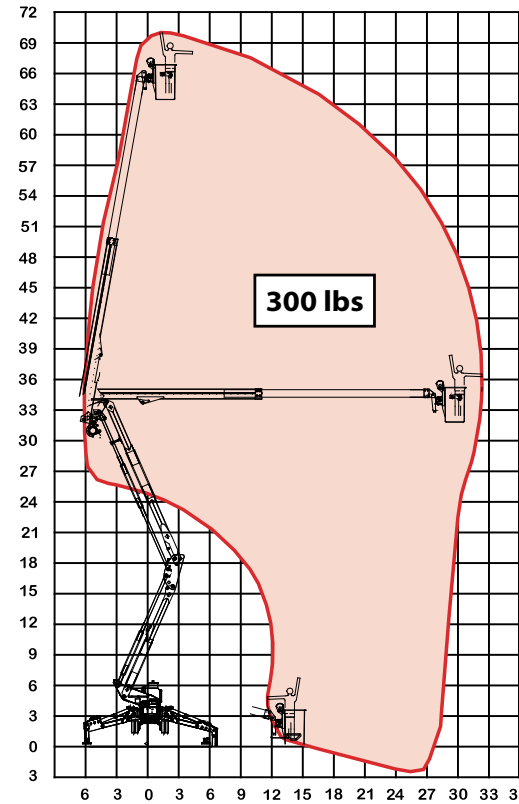

ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors