


PLATFORM BASKET 27.14



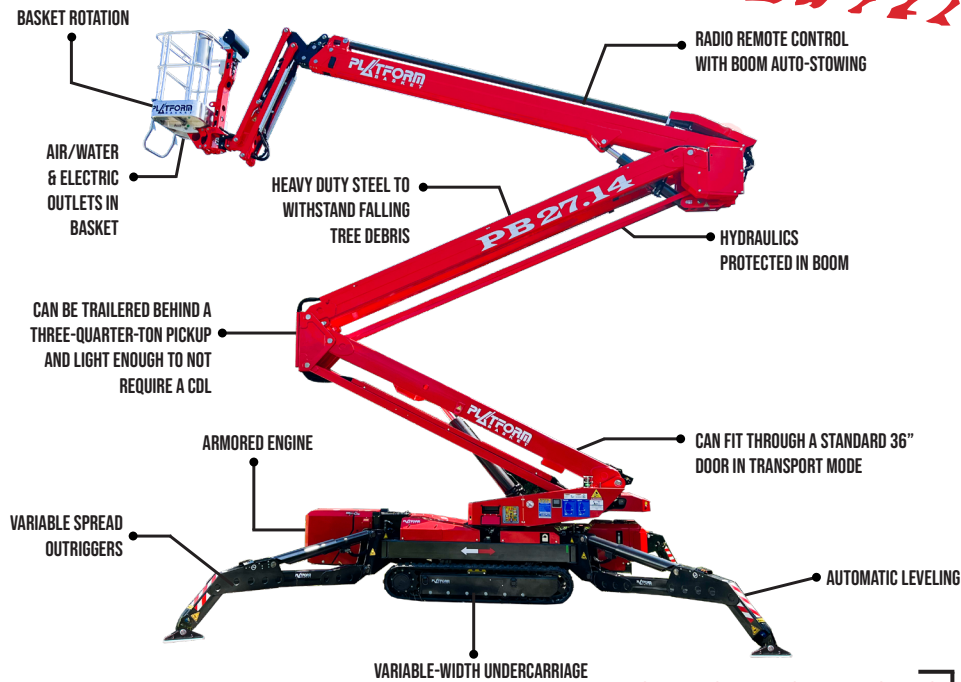


SPECIFICATIONS

Max. working height	89'
Max. outreach	50' (wide mode) / 35' (narrow mode)
Max. basket load	507 lbs
Basket size	2'3" x 1'11" x 3'7" (1-man basket interior)
Basket rotation	+ / - 90°
Turret rotation	+ / - 180°
Traveling length	23'3" (20'7" without basket)
Traveling height	6'6"
Traveling width	2'11" (narrow mode) / 4'3" (wide mode)
Outrigger Spread	15'6" x 17'2" wide position / 11'5" x 21' narrow position
Battery	12V Emergency Descent System
Diesel Engine	Kubota Diesel, 22 HP
Total weight	11,500 lbs
Gradability, max. across slope	31% (17°)
Gradability, max. up and down slope	31% (17°)
Deployment ability on slopes up to	31% (17°)

DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

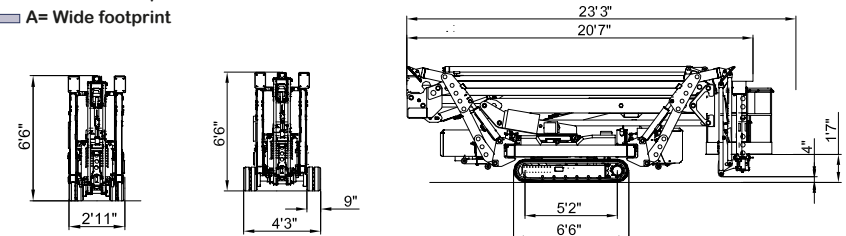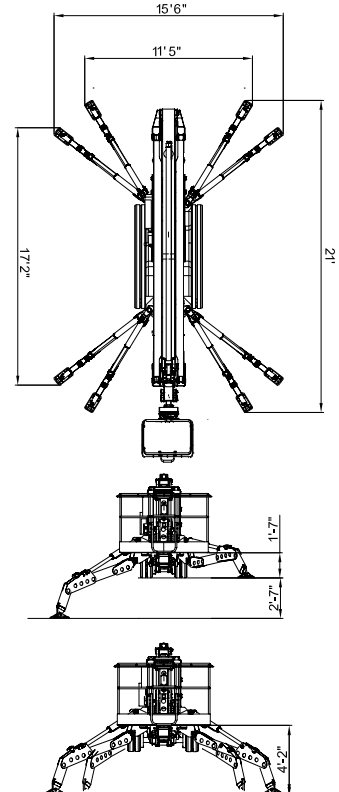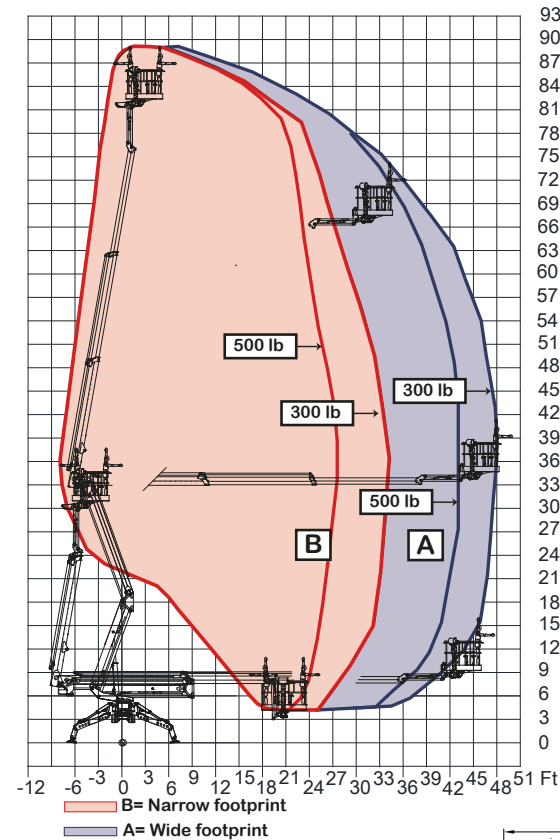

ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors
- 2-man Basket
- Hybrid 24V Lithium Battery Pack
- Wind Gauge to Monitor Max Wind Speed
- Intercom
- Basket Light