


# OMMELIFT 2750

## 90' WORKING HEIGHT



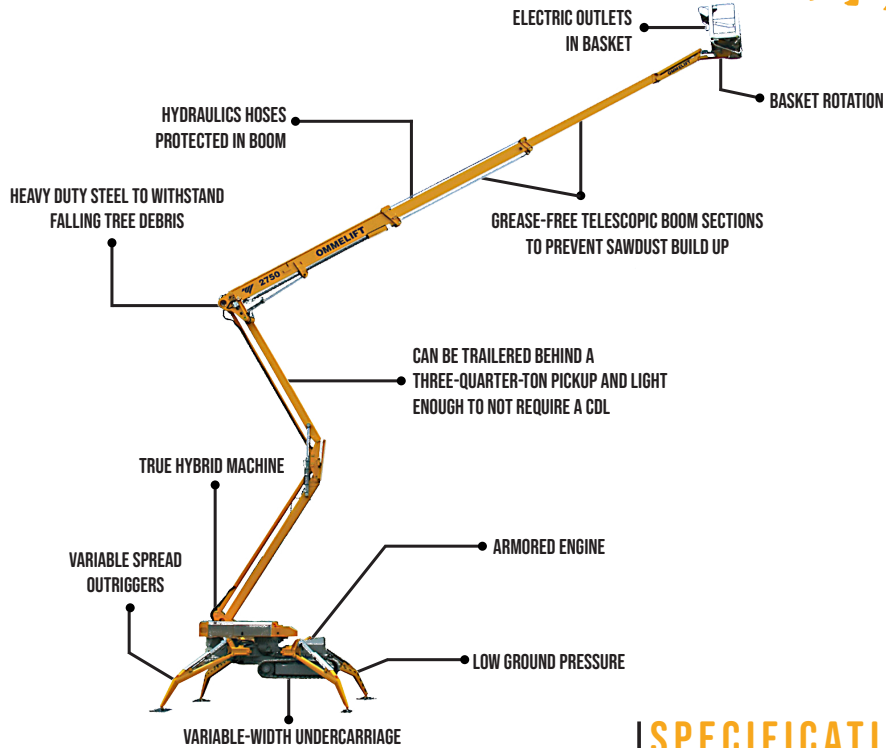


### SPECIFICATIONS

<b>Max. working height</b>	90'2"
<b>Max. outreach</b>	49' (at 176 lbs)
<b>Max. basket load</b>	550 lbs
<b>Basket size</b>	2'8" x 2'6" x 3'7" (1-man basket interior)
<b>Basket rotation</b>	+ / - 41°
<b>Turret rotation</b>	+ / - 355°
<b>Traveling length</b>	24'1" (21'7" without basket)
<b>Traveling height</b>	7'2"
<b>Traveling width</b>	3'8" (narrow mode) / 4'11" (wide mode)
<b>Outrigger Spread</b>	17'5" x 17'5" wide position / 21'10" x 10'7" narrow position
<b>Battery</b>	24V 200Ah/5h
<b>Charger</b>	24V / 25A
<b>Diesel engine</b>	14kW / 18.8HP
<b>Total weight</b>	11,420 lbs
<b>Gradability, max. across slope</b>	35% (19.3°)
<b>Gradability, max. up and down slope</b>	35% (19.3°)
<b>Deployment ability on slopes up to</b>	40% (21.8°)

### DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

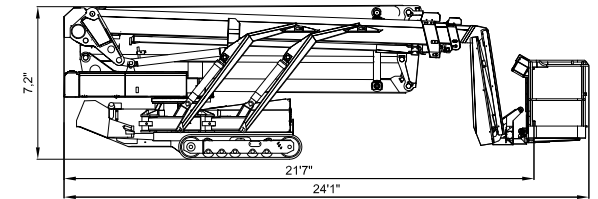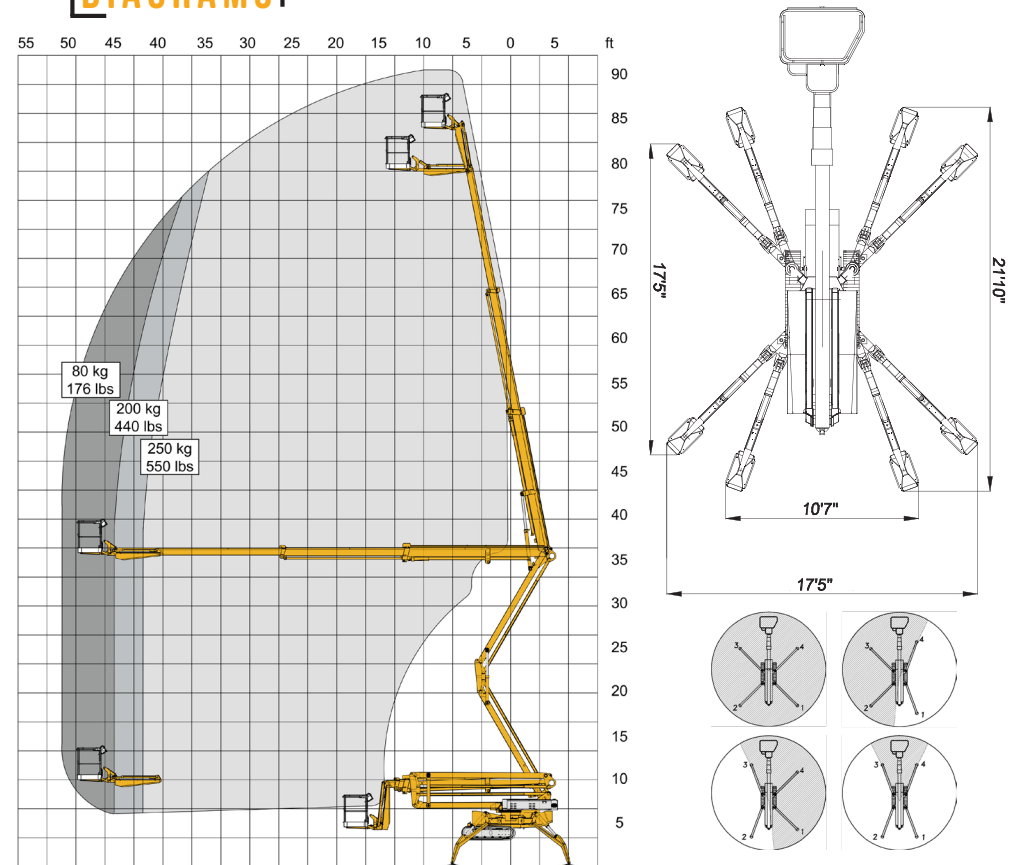

### ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors
- Spotlight in Basket
- Flashing Beacon Lights on Boom Stabilizers (5)
- Radio Remote Control Drive
- Auto Leveling
- Intercom
- 2nd Electric Drive Motor