


20.95

64' WORKING HEIGHT

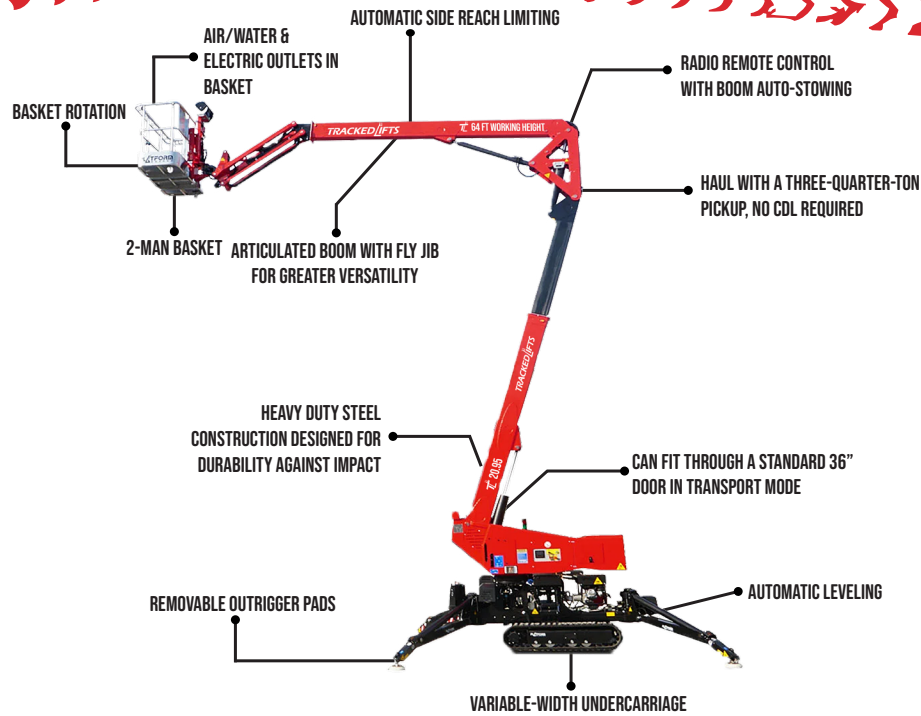


SPECIFICATIONS

Max. working height	64'
Max. outreach	31'2"
Max. basket load	551 lbs
Basket size	4'6" x 2'3" (2-man basket)
Basket rotation	± 70° (± 90° with 1-man basket)
Turret rotation	360° non-continuous
Traveling length	15'11" (18'2" with basket)
Traveling height	6'6" narrow mode / 7'3" wide mode
Traveling width	2'7" narrow mode / 3'6" wide mode
Outrigger Spread	10'8" x 10'12"
Battery	24V Lithium Ion Hybrid Power
Diesel Engine	Kubota Diesel, 11 HP
Total weight	6,283 lbs
Gradability, max. across slope	31% (17°)
Gradability, max. up and down slope	36% (20°)
Deployment ability on slopes up to	31% (17°)

DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

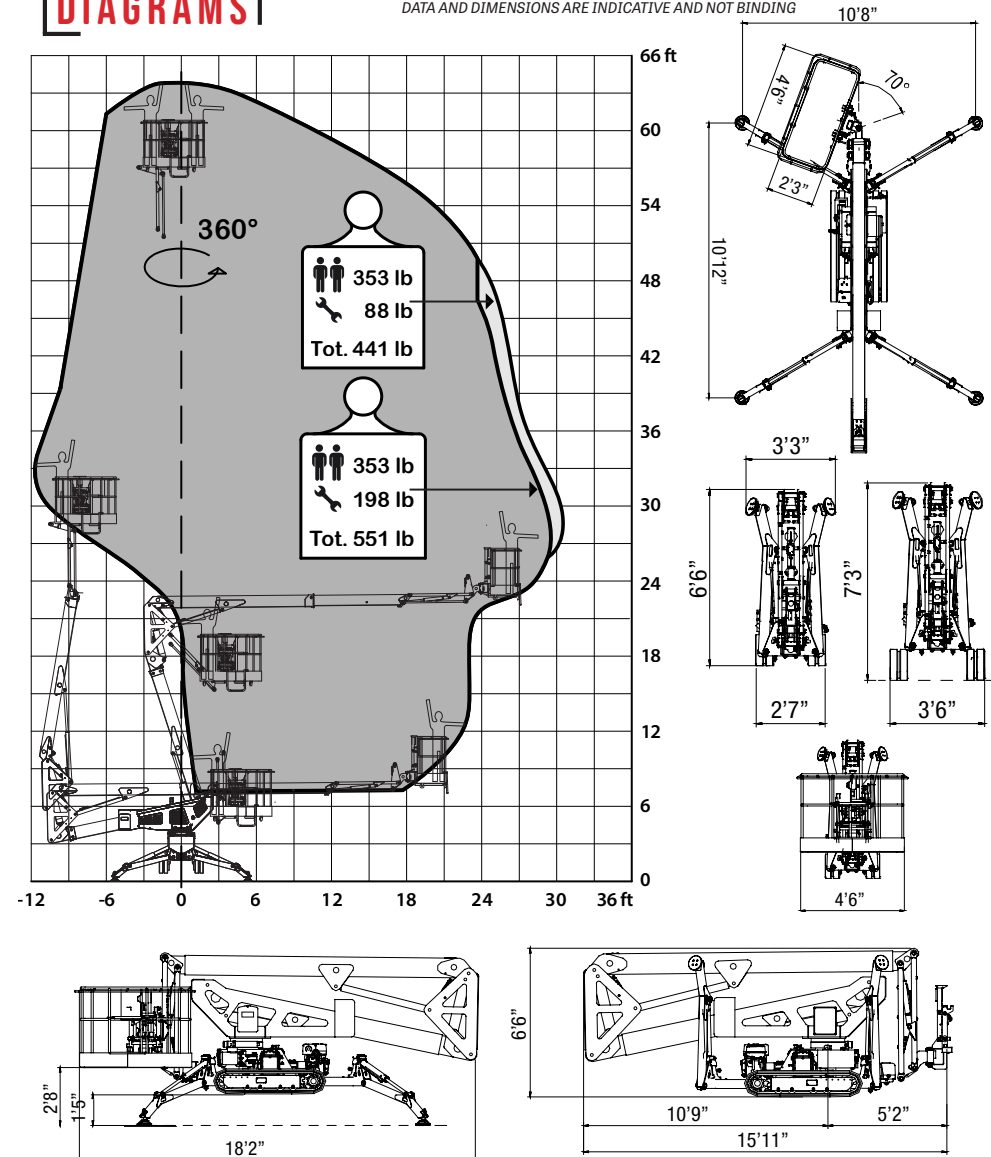

ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors