


π 22.10 72' WORKING HEIGHT

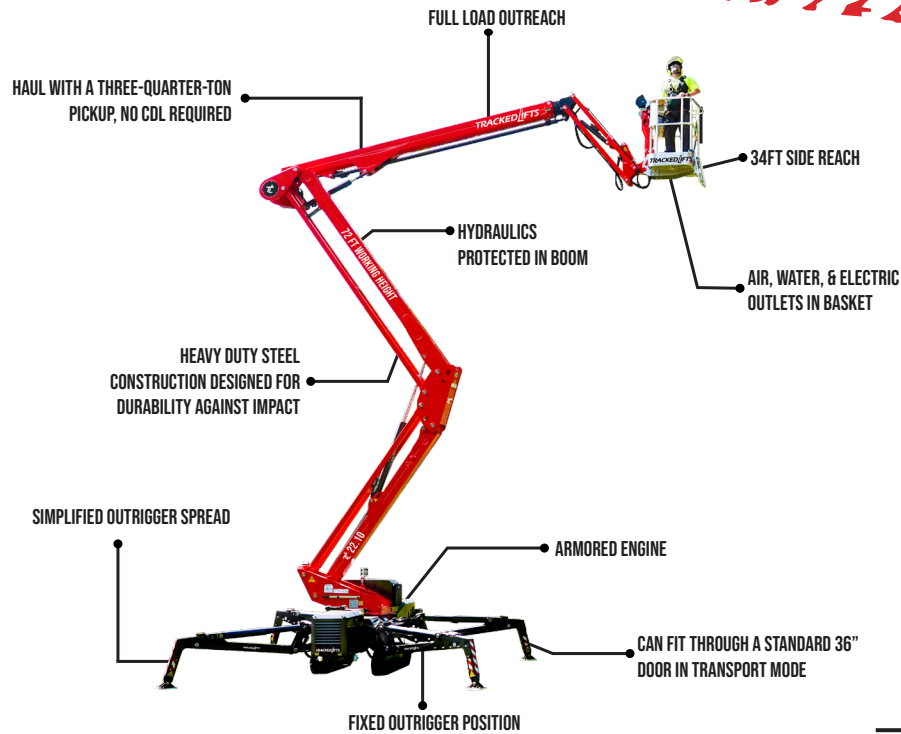


SPECIFICATIONS

Max. working height	72'
Max. outreach	34' unrestricted
Max. basket load	300 lbs
Basket size	2'7" x 2'3" (1-man basket)
Turret rotation	360° non-continuous
Traveling length	19'3" (20'7" with basket)
Traveling height	6'9" narrow mode / 7'1" wide mode
Traveling width	2'11" narrow mode / 3'8" wide mode
Outrigger Spread	14'7" x 14'7"
Battery	12V Emergency Descent System
Diesel Engine	Kubota Diesel, 15 HP
Total weight	6,900 lbs
Gradability, max. across slope	31% (17°)
Gradability, max. up and down slope	29% (16°)
Deployment ability on slopes up to	31% (17°)

DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

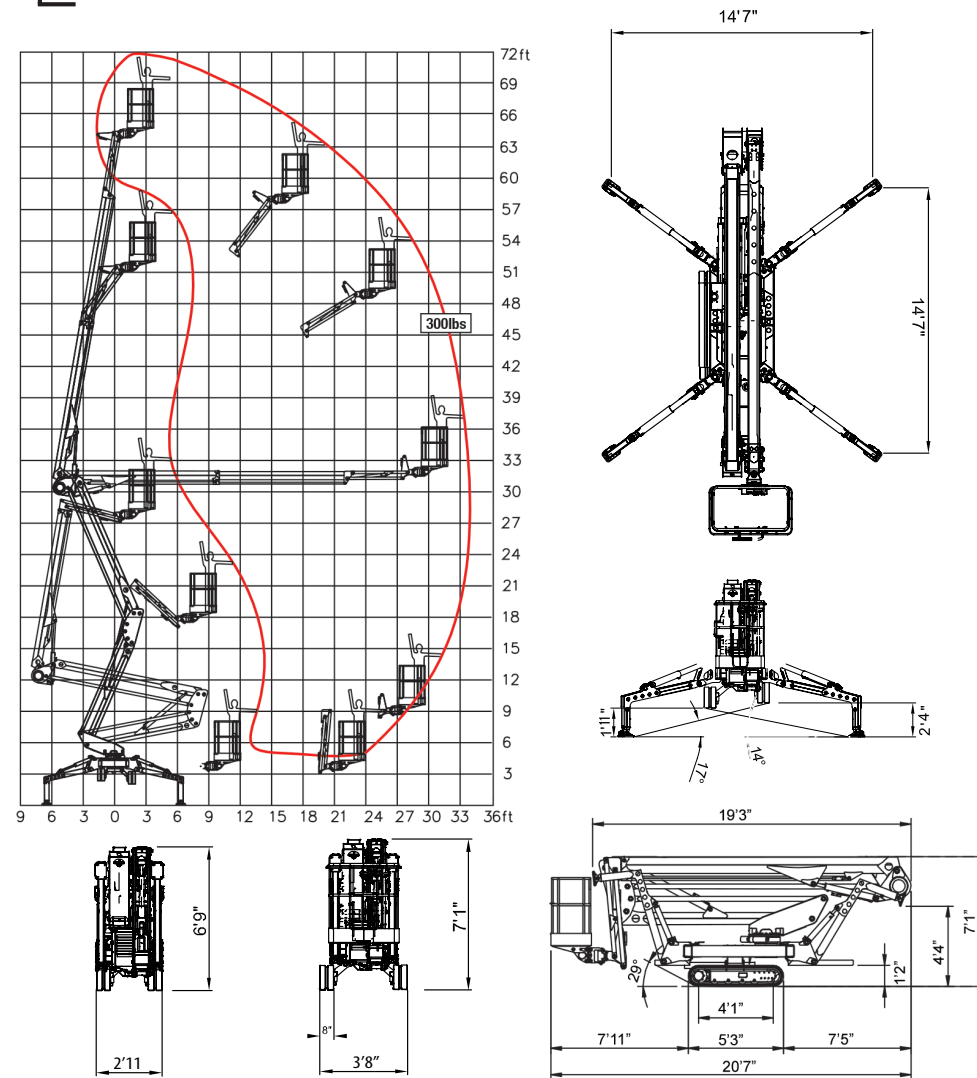

ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors